

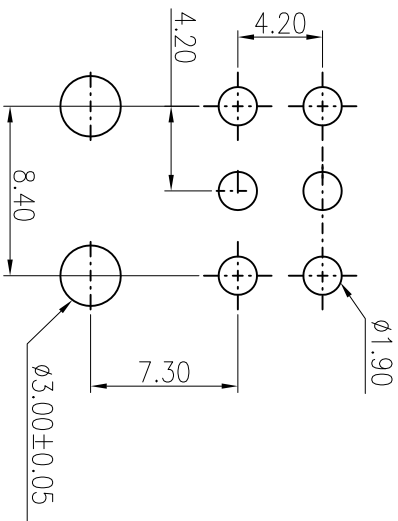
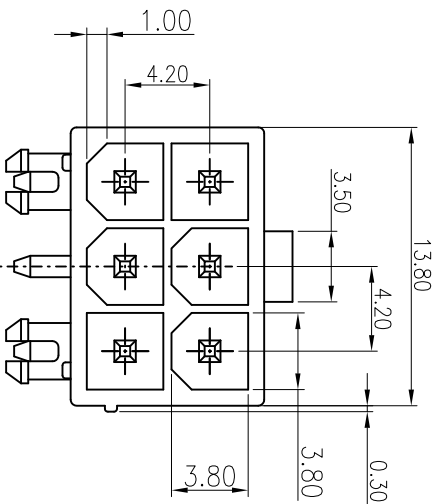


ROHS compliant

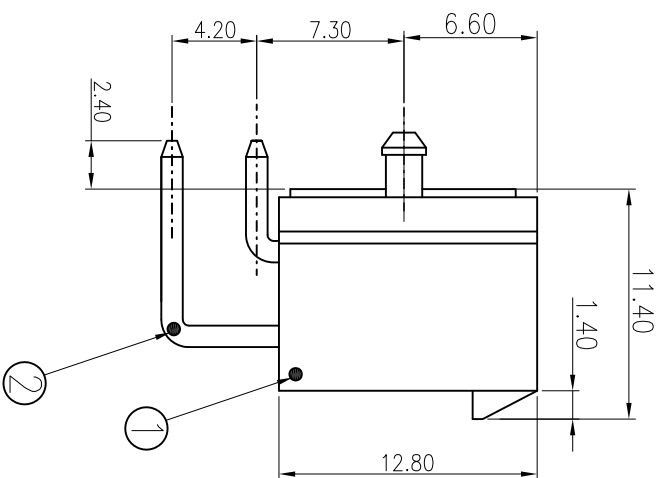

RECOMMENDED P.C.B. HOLE LAYOUT
(TOLERANCE: ±0.05)

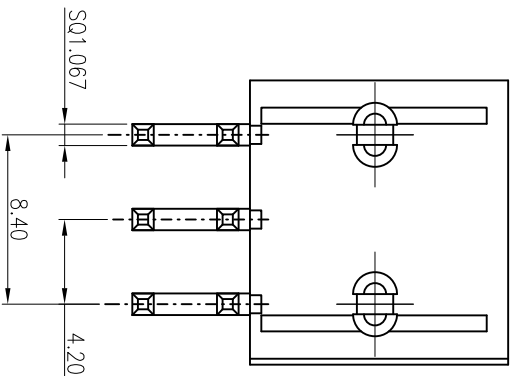

Ordering Information:

AX06B - 3 8 X X C X - X - X X

Housing Material: ☐ MO:HY140 N/A:未指定

A:ICP C:NY6T Housing Color: ☐ L:No Halogen N/A:ROHS

... K:BLACK ...

Contact Area Plating: ☐ Packing: T:Tray ...

2.50u" NI 100u TIN

...

2	CONTACT	BRASS	6	Underplate:Min.Ni50u",Solder Tails:Min 100u" tin	SQ=1.067
1	HOUSING	NY6T GF30%	1	UL94V-0	BLACK
NO.	NAME	MATERIAL	Q'TY	STANDARD	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)					
	MM		SCALE: 1:1	NUMBER:	
.X	±0.38		DRAWN BY 张健	DATE 2014.03.26	
.XX	±0.25		CHECKED BY 张健	DATE 2014.03.26	
.XXX	±0.13		APPROVED BY DATE		
ANGULAR ±3°					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

深圳市瀚云通科技有限公司
SHENZHEN HANYUNTONG TECHNOLOGY LIMITED

NAME:

ATX POWER 6P 90度HP排距4.2 PIN长2.40带规柱

THIRD ANGLE PROJECTION

REUSE ON CAD ONLY

DWG NO. AX-0038-0

SHEET NO. 1/1

F

E

D

C

B

A

F

E

D

C

B

A