

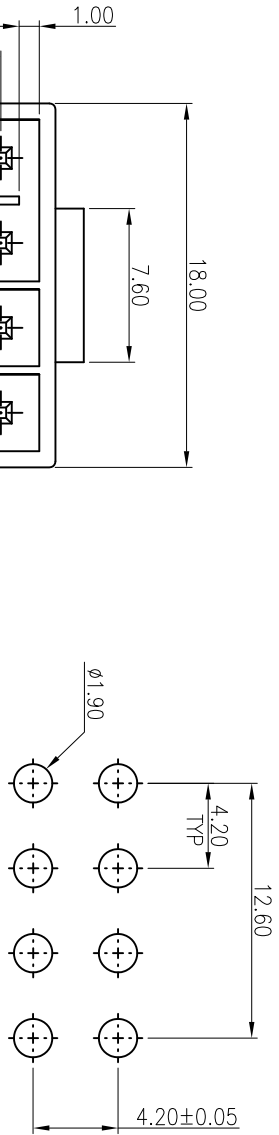


ROHS compliant

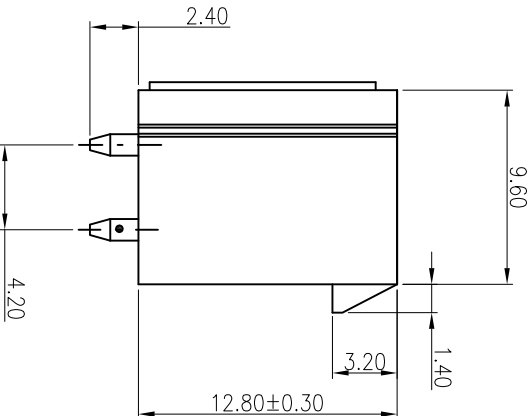

RECOMMENDED P.C BOARD LAYOUT (T=1.6mm)
PCB TOLERANCE:±0.05

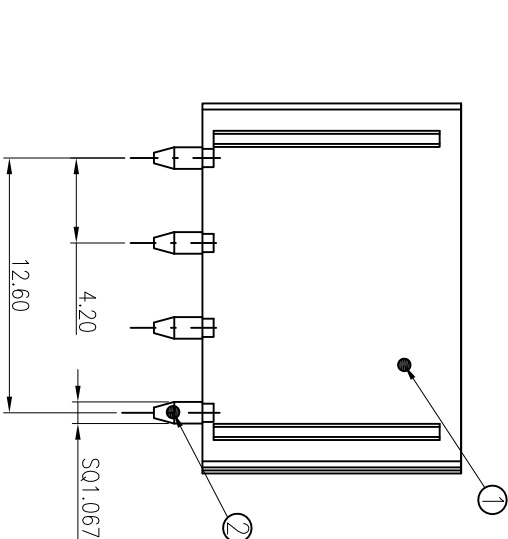

Ordering Information:

AX08A -- 0 2 7 X X C X -- X -- XX

Housing Material: A:ICP

Housing Color: K:BLACK

HF:No Hologen
RS:ROHS

Packing: T:Troy

Contact Area Plating
2.50u" NI 100u TIN

2	CONTACT	BRASS	8	Underplate: 50u" Ni, Solder Tails: 100u" tin	SQ=1.067
1	HOUSING	LCP	1	UL94V-0	BLACK
NO.	NAME	MATERIAL	Q'TY	STANDARD	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE: 1:1	NUMBER:	
		MM	DRAWN BY 张健	DATE 2014.07.02	 深圳市瀚云通科技有限公司 SHENZHEN HANYUNTONG TECHNOLOGY LIMITED
.X		±0.38	DRAWN BY 张健	DATE 2014.07.02	
.XX		±0.25	DRAWN BY 张健	DATE 2014.07.02	
.XXX		±0.13	CHECKED BY	DATE	
ANGULAR ±3°					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			APPROVED BY	DATE	
			 THIRD ANGLE PROJECTION	DWG NO. AX08A-027XXCX-X-XX	REVISION ON CAD ONLY
					SHEET NO. 1/1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
A4					