



REV	DESCRIPTION	ECN NO.	DATE
0	原始图档		10.11.18

CONTACT: BRASS C2680H SQ=1.06/mm
2.FINISH:
CONTACT: 100u" MIN. TIN PLATING ON SOLDER TAILS
50u" MIN. NICKEL UNDERPLATING OVER ALL

```

AX08B - 3 6 X X C X - X
      |
Housing Material:
A:ICP
      |
Housing Color:
... K:BLACK
      |
Contact Area Plating
2:50u " NI 100u TIN
...

```

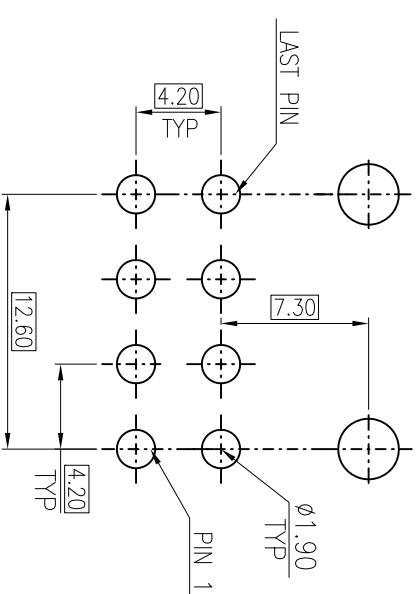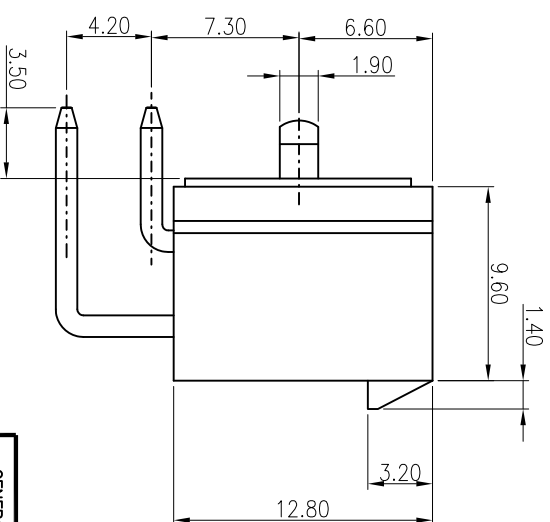

Technical drawing showing a side view of a mechanical assembly. The drawing includes dimensions in millimeters (mm):

- 4.20 mm: Distance between the top two pins.
- 12.60 mm: Distance between the bottom two pins.
- 1.067 mm: Distance from the bottom edge to the bottom pin center.

GENERAL TOLERANCES (UNLESS SPECIFIED)						SCALE:		NUMBER:	
						1:1			
						MATERIAL:		HRC:	
						MM			
X						±0.38			
.XX						±0.25			
.XXX						±0.13			
ANGULAR ±3°									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						DRAWN BY DATE		JOHN 10.11.18	
						CHECKED BY DATE			
APPROVED BY DATE									
						NAME:			
						ATX POWER 8P 90度DIP特殊封装插口PIN长3.5			
SHENZHEN HAOYUNTONG TECHNOLOGY LIMITED									
THIRD ANGLE PROJECTION						REVERSE ON CAD ONLY			
PART NO. AX08B-36XXCX-X						DWG NO. AX-0036-0		SHEET NO. 1/1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX A44 INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									