
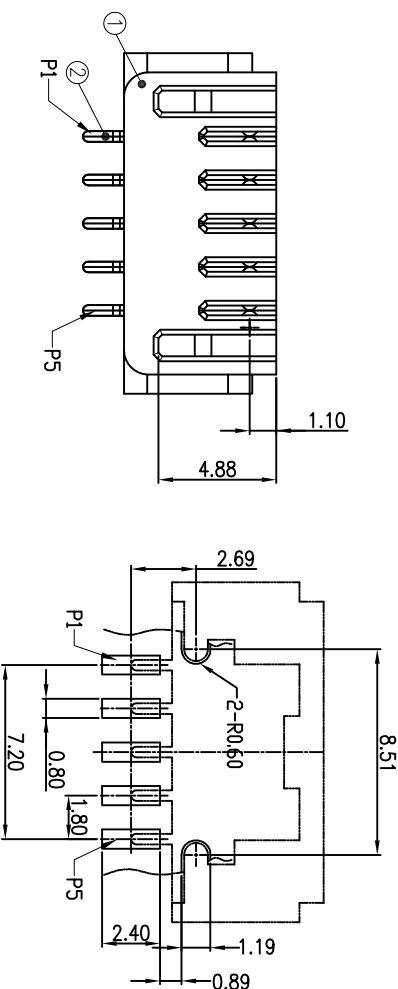
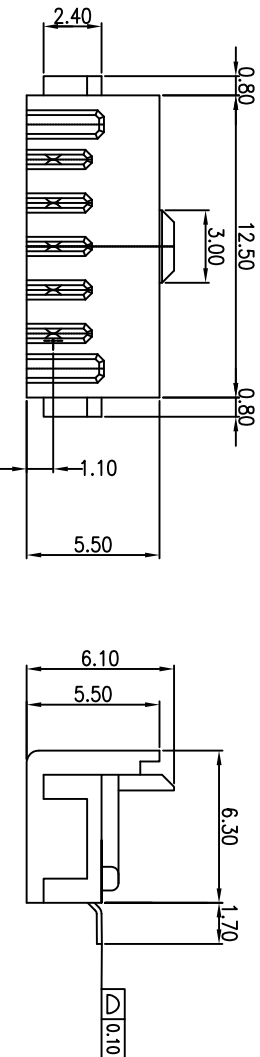


ROHS compliant

REV	DESCRIPTION	ECN NO.	DATE
AA	原始图档		2014.07.02

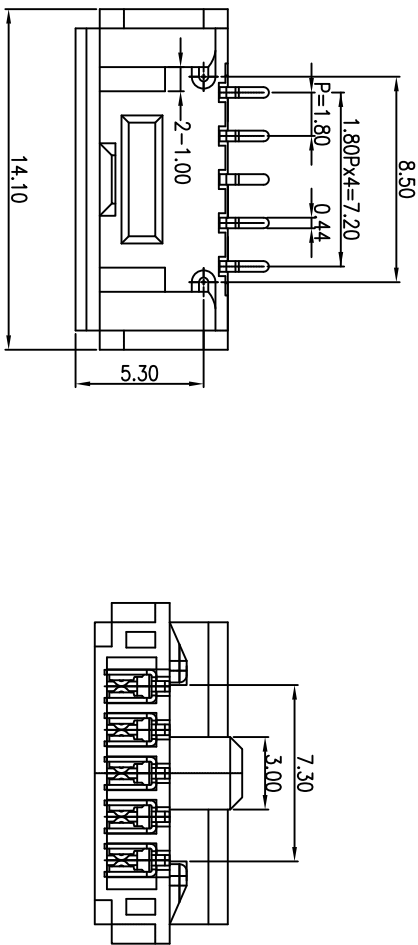

Ordering Information:

BA05D-04 X X X - X - X X
Housing Material: LCP
A=LCP
Housing Color: K:BLACK
PLATING TYPE: B=GOLD/TIN
PLATING THICKNESS: 9.4U", 4.10U", 5.15U"
Packing: U:Tube
HF:No Halogen
RS:ROHS

2	CONTACT	PHOSPHOR BRONZE	5	Underplate:Min.Ni 50u" Mating areat:Min.Au SELECTION Solder Tails:Min 100u" in	C5210
1	HOUSING	LCP GF30%	1	UL94V-0	BLACK
NO.	NAME	MATERIAL	Q'TY	STANDARD	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:	NAME: 深圳市瀚云通科技有限公司 SHENZHEN HANYUNTONG TECHNOLOGY LIMITED	
MM	DESIGN BY 洪家亮	DATE 2014.07.02	BATTERY CONNECTOR SOCKET 5P SMT TYPE		
.X	±0.38	DRAWN BY 李玉霞			DATE 2014.07.02
.XX	±0.25	CHECKED BY DATE			
.XXX	±0.13				
ANGULAR ±3°					
WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE	PART NO. BA05D-04XXXX-X-XX	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
			DWG NO. BA-004-0		SHEET NO. 1/1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		A4			

PCB LAYOUT
SUGGESTED TOLERANCE: ±0.05mm