


ROHS compliant

REV	DESCRIPTION	ECN NO.	DATE
AA	原始图档		2016.05.24

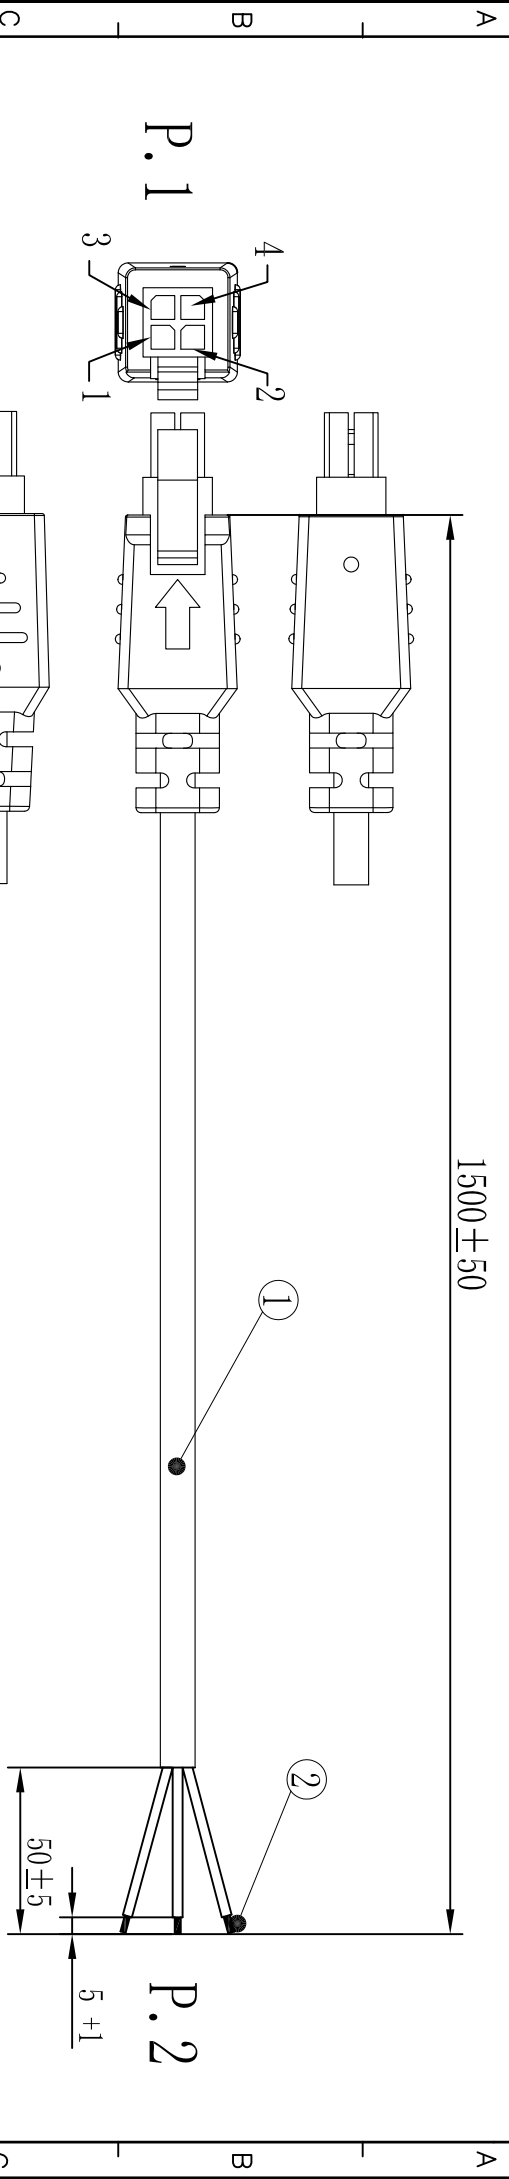

接点图

P.1	P.2
1	N/C
2	WHITE
3	BLACK
4	RED
	OPEN

NOTE

- ELECTRICAL;  
(1) 100% OPEN SHORT & MISSWIRE TEST  
(2) INSULATOR RESISTANCE: DC300V 10MΩ MIN;  
(3) CONNECTOR RESISTANCE: 20mΩ MAX

5	PVC 45P 蓝色	G
4	PE 内模料	G
3	PITCH 3.0 母胶黑色四方	PCS
2	PITCH 3.0 前金后锡母端	PCS
1	UL 2426 22#*3C BLACK (RED BLACK WHITE)	MM
项次	规格描述	数量 单位

GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:
MM		DESIGN BY DATE	2016.05.24
.X	±0.38	DRAWN BY DATE	2016.05.24
.XX	±0.25	CHECKED BY DATE	2016.05.24
.XXX	±0.13	APPROVED BY DATE	
ANGULAR ±3°		PART NO. PRO4W-014XXX-X-XX	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DWG NO. PR-014-1	
<p>深圳市瀚云通科技有限公司 SHENZHEN HANYUNTONG TECHNOLOGY LIMITED</p>			
NAME: PITCH 3.0 3PIN M 10 OPEN 2*2P		THIRD ANGLE PROJECTION	
PLATING TYPE: B:GOLD/TIN F:GOLD/MATTE TIN		REVERSE ON CAD ONLY	
PLATING THICKNESS: 7:Gold Flash 5:15μ		SHEET NO. 1/1	
Packing: P:PE Bagg		A4	

Ordering Information:

PRO4W - 014 X X X X - X - XX  
 Housing Material: B:PBT D=NY46  
 Housing Color: K:BLACK  
 ...  
 PLATING TYPE: B:GOLD/TIN F:GOLD/MATTE TIN  
 PLATING THICKNESS: 7:Gold Flash 5:15μ  
 Packing: P:PE Bagg