
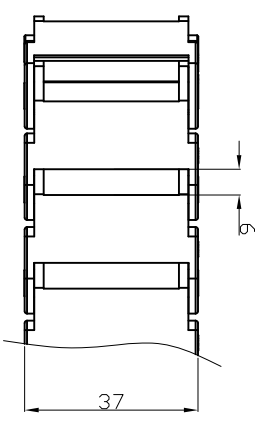


ROHS compliant

REV	DESCRIPTION	ECN NO.	DATE
△0	原始图档		2016.06.25

- NOTES
- 1.MATERIAL:PA66+30%GF,BLACK,94-V0
  - 2.BEAR THE MINIMUM PULLING FORCE IS 10KG FOR EACH SEGMENTS.
  - 3.BEAR THE MINIMUM PRESSURE FORCE IS 10KG FOR EACH SEGMENTS.
  - 4.ROHS COMPLIANT
  - 5.Operating Temperature Range:-20℃~+80℃

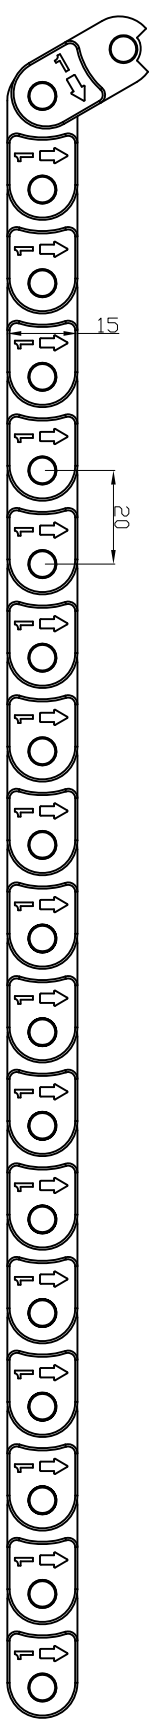

Ordering Information:  
1CC00-D270 J K - XX - C

Housing Material: J:PA66  
Housing Color: K:BLACK  
...  
HF: No Halogen  
RS: ROHS

1	CABLE CHAIN(W37)	PA66 GF30%	18	UL94V-0	BLACK
NO. NAME		MATERIAL	Q'TY	STANDARD	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1			
MM	DESIGN BY DATE	NUMBER:			
X ±0.38	每段# 2016.06.25	DRAWN BY DATE			
XXX ±0.25	每段# 2016.06.25	CHECKED BY DATE			
XXX ±0.13	每段# 2016.06.25	APPROVED BY DATE			
ANGULAR ±3°		THIRD ANGLE: W37拖链(18个)		PROJECTION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO. 1CC00-D270JK-XX-C		DWG NO. CC-270	
		SHENZHEN HANYUNTONG TECHNOLOGY LIMITED		SHEET NO. 1/1	
				REVISE ON CAD ONLY	
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HANYUN INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
				A4	

