
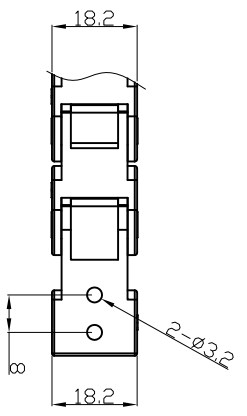


ROHS compliant

REV	DESCRIPTION	ECN NO.	DATE
△0	原始图档		2016.06.25

- NOTES
- 1.MATERIAL:PA66+30%GF,BLACK,94-V0
  - 2.BEAR THE MINIMUM PULLING FORCE IS 15KG FOR EACH SEGMENTS.
  - 3.BEAR THE MINIMUM PRESSURE FORCE IS 15KG FOR EACH SEGMENTS.
  - 4.ROHS COMPLIANT
  - 5.Operating Temperature Range:-20℃~+80℃

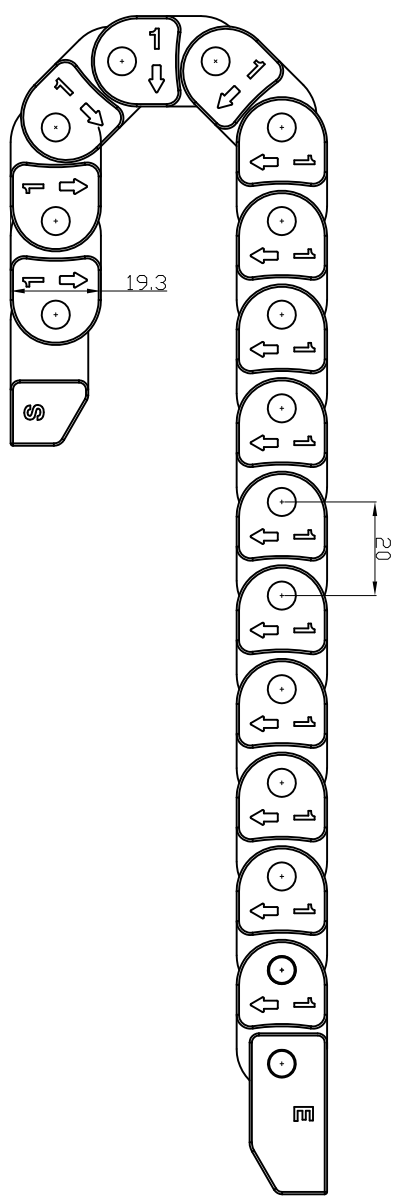

Ordering Information:  
 1CC00-D271 J K - XX - C

Housing Material: J:PA66

Housing Color: HF:No Halogen  
 K:BLACK  
 RS:ROHS

NO.	NAME	MATERIAL	Q'TY	STANDARD	NOTE
3	CABLE CHAIN(S部件)	PA66 GF30%	1	UL94V-0	BLACK
2	CABLE CHAIN(E部件)	PA66 GF30%	1	UL94V-0	BLACK
1	CABLE CHAIN(W18.2)	PA66 GF30%	15	UL94V-0	BLACK

GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE:	NUMBER:
MM		1:1	
X	±0.38	DESIGN BY DATE	2016.06.25
XXX	±0.25	DRAWN BY DATE	2016.06.25
XXX	±0.13	CHECKED BY DATE	
ANGULAR ±3°		APPROVED BY DATE	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

REVERSE ON CAD ONLY

SHENZHEN HANYUNTONG TECHNOLOGY LIMITED

深圳市瀚云通科技有限公司

W18.2拖链(带E,S部件)

PART NO. 1CC00-D271JK-XX-C

DWG NO. CC-271

SHEET NO. 1/1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HANYUN INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

