
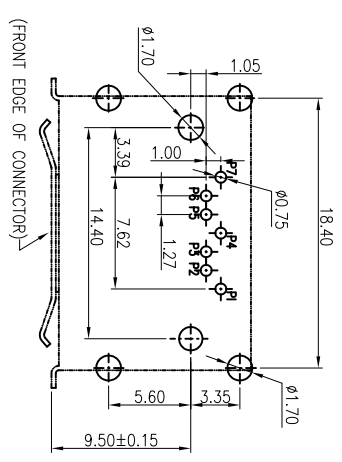

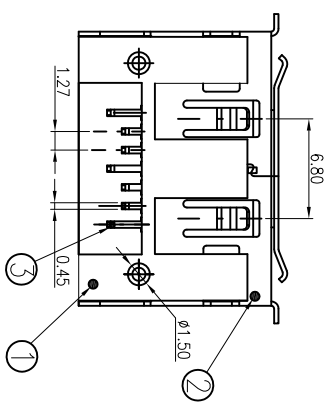

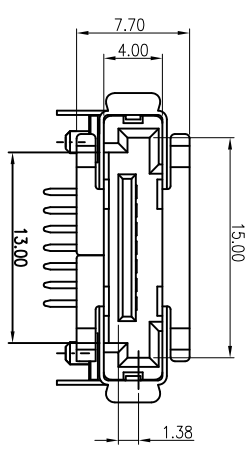


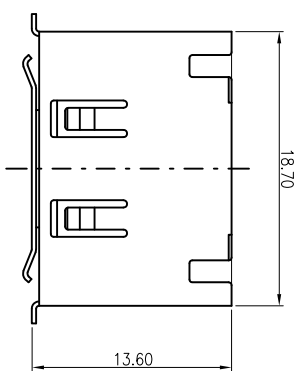

RECOMMEND P.C.B. BOARD MOUNTING DIMENSIONS (±1.60mm)
PCB TOLERANCE:±0.05

Ordering Information:

E A 07 B - 005 A K B 7 - T - R S

Housing Material: _____

Housing Color: _____

K:BLACK

Packing: _____

HF:No Halogen
RS:ROHS

PLATING TYPE _____

PLATING THICKNESS _____

T:Gold Flash

3	CONTACT	BRASS	7	Underplate:Min.Ni30u", Mating area:Min.Au Gold Flash Solder Tails:Min 80u" in	
2	SHELL	BRASS	1	Min. Ni 30u"	
1	HOUSING	LCP	1	UL94V-0	BLACK
NO.	NAME	MATERIAL	Q'TY	STANDARD	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)					
	MM	SCALE: 1:1	NUMBER:	 瀚云电子科技(香港)有限公司 HANYUN ELECTRONICS TECHNOLOGY(HONG KONG)LIMITED ESATA 7P 板端平躺式板上双排脚DIP型	
.X	±0.38	DRAWN BY 张健	DATE 2017.03.08		
.XX	±0.25	DRAWN BY 张健	DATE 2017.03.08		
.XXX	±0.13	CHECKED BY DATE			
	ANGULAR ±3°				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE	PART NO. EAO7B-005AKB7-T-RS	DWG NO. EX-005	SHEET NO. 1/1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
					A4

REV	DESCRIPTION	ECN NO.	DATE
AA	原始图档		2017.03.08