
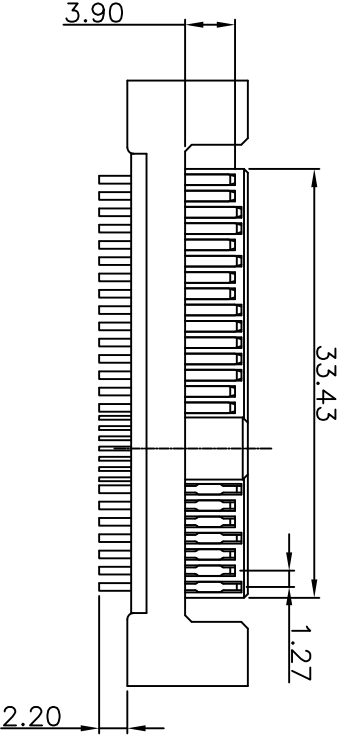

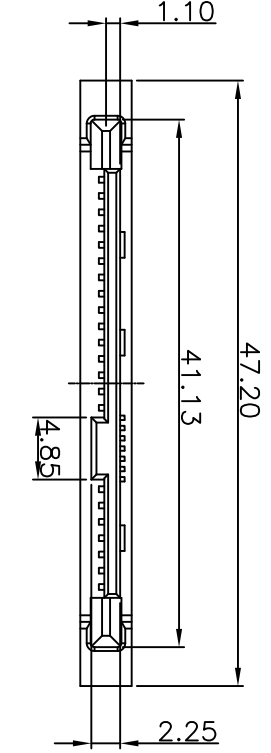



ROHS compliant

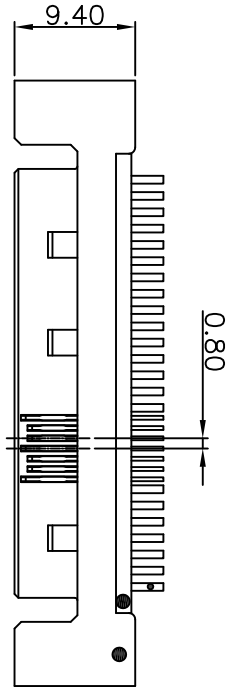

REV	DESCRIPTION	ECN NO.	DATE
△A0	原始图档		2014.09.23

1. ELECTRICAL:
 CURRENT RATING:1.5A
 VOLTAGE RATING:15V DC
 CONTACT RESISTANCE:INITIALLY 30m ohms MAX,
 RESISTANCE INCREASE 15m ohms MAX AFTER STRESS
 INSULATION RESISTANCE:1000M ohms MIN
 DIELECTRIC WITHSTADING VOLTAGE:500 V AC FOR 1MINUTE

Ordering Information:

SS29E-18 X X X X - X - X - X X
 Housing Material: _____
 A:LCP
 ...
 Housing Color: _____
 K:BLACK
 ...
 PLATING TYPE _____
 B:GOLD/TIN 5:15μ"
 F:GOLD/MATTE TIN 6:30μ"
 7:Gold Flash

3	CONTACT	BRASS	29	Underpin:Min.Ni50%, Moling are:Min.Au SELECTION! Solder Tolerance:Min 100μ" Min	C2680	
2	STOPPER	LCP GF30%	1		BLACK	
1	HOUSING	LCP GF30%	1		BLACK	
NO.	NAME	MATERIAL	Q'TY	STANDARD	Plated	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:			
	MM	DESIGN BY	DATE	深圳市瀚云通科技有限公司 SHENZHEN HANYUNTONG TECHNOLOGY LIMITED		
	.X	张健	2014.09.23	NAME: SAS 29P 180度公母焊线式		
	.XX	张健	2014.09.23	DRAWN BY DATE		
	.XXX			CHECKED BY DATE		
ANGULAR ±3°		APPROVED BY DATE		THIRD ANGLE PROJECTION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO.	DWG NO.	REVISE ON CAD ONLY	SHEET NO.	
		SS29E-18XXX-X-X-XX	SS-018		1/1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		A4		