
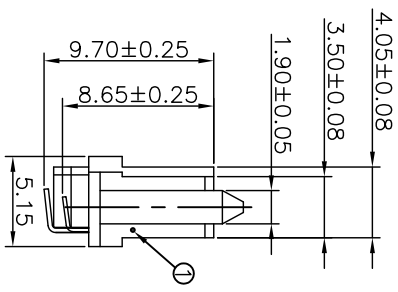
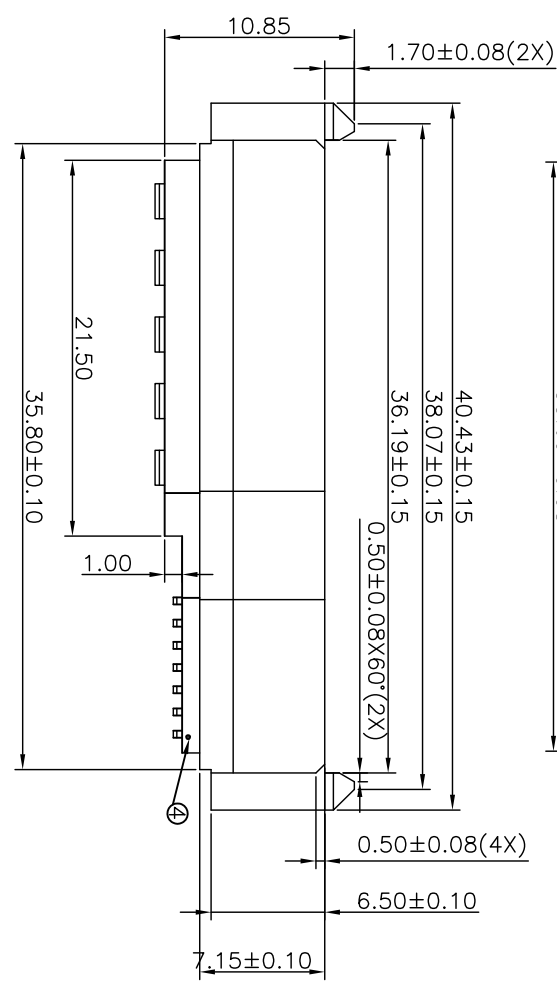



ROHS compliant	1	2	3	4	5	6	7	8
REV	DESCRIPTION	ECN NO.	DATE					
A0	原始图档		2014.08.02					

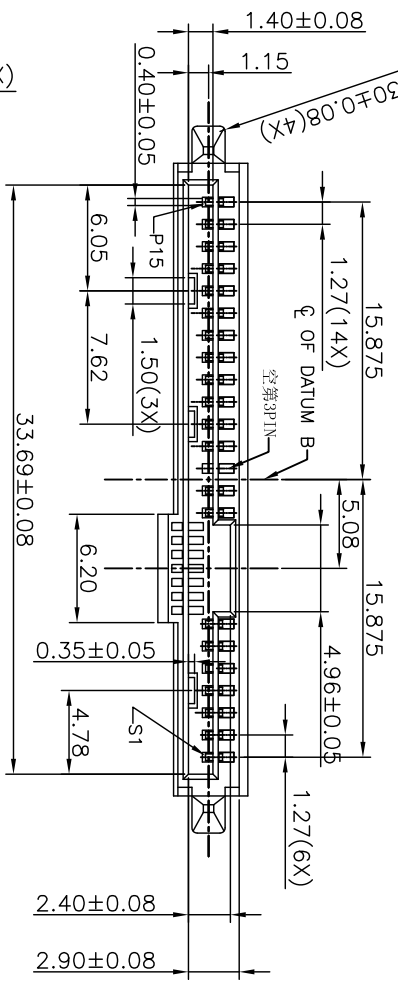

Ordering Information:
 SS29E-71 X X X X X X X X X X X X
 Housing Material: B:PBT
 Housing Color: K:BLACK
 PLATING TYPE: F:GOLD/MATTE TIN
 PLATING THICKNESS: 5:1.51μm, 6:3.01μm, 7:Gold Flash
 Packing: T:Tray
 L:No Halogen (无卤)
 MO:HY140标准
 未填: 非特殊指定标准
 未填: 普通DIPS

1. MECHANICAL:
 INSERTION FORCE: 50N MAX
 REMOVAL FORCE: 20N Min

21. ELECTRICAL:
 CURRENT RATING: 1.5A
 VOLTAGE RATING: 15V DC
 CONTACT RESISTANCE: INITIALLY 30m ohms MAX,
 RESISTANCE INCREASE 15m ohms MAX AFTER STRESS
 INSULATION RESISTANCE: 1000M ohms MIN
 DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC FOR 1MINUTE AT SEA LEVEL

4	COVER	PBT GF30%	1	UL94V-0	BLACK
3	15P CONTACT	PHOSPHOR BRONZE	15	Underplate:Min.Ni50u", Mating area:Min.Au SELECTIVE Solder Tails:Min 100u" Sn	C5191
2	07P CONTACT	PHOSPHOR BRONZE	7	Underplate:Min.Ni50u", Mating area:Min.Au SELECTIVE Solder Tails:Min 100u" Sn	C5191
1	HOUSING	PBT GF30%	1	UL94V-0	BLACK

NO.	NAME	MATERIAL	Q'TY	STANDARD	NOTE
-----	------	----------	------	----------	------

GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE:	NUMBER:
MM	5:1		
XX	±0.36	DESIGN BY	张健
XXX	±0.25	DRAWN BY	张健
XXXX	±0.13	CHECKED BY	2014.08.02
ANGULAR ±3°		APPROVED BY	DATE

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



NAME: SAS 29P 29P 29P
 15P为3连PIN(空第3PIN)

1 2 3 4 5 6 7 8