
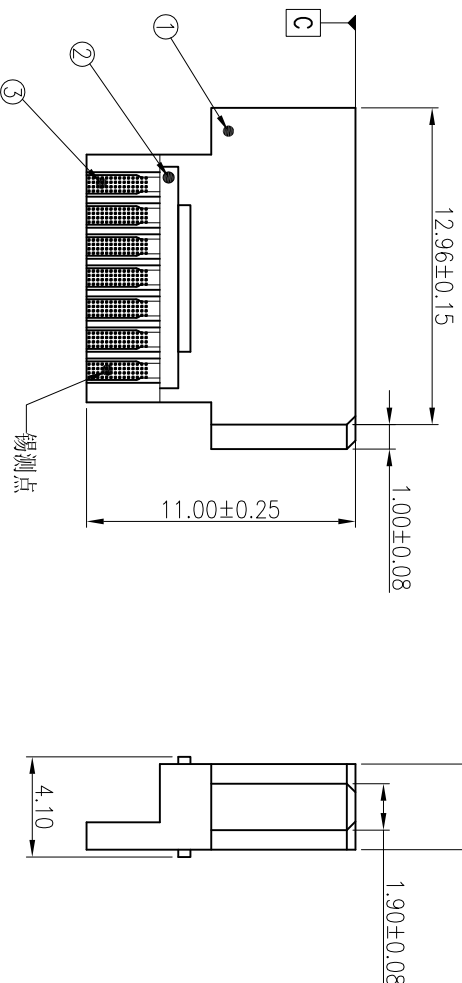
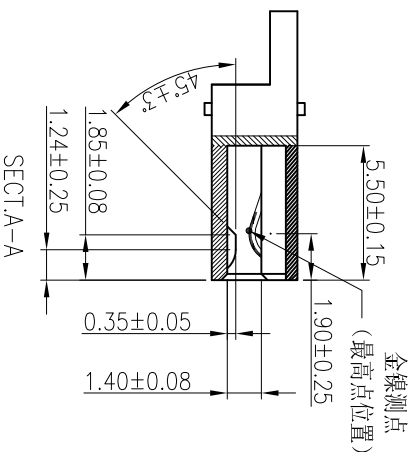


ROHS compliant

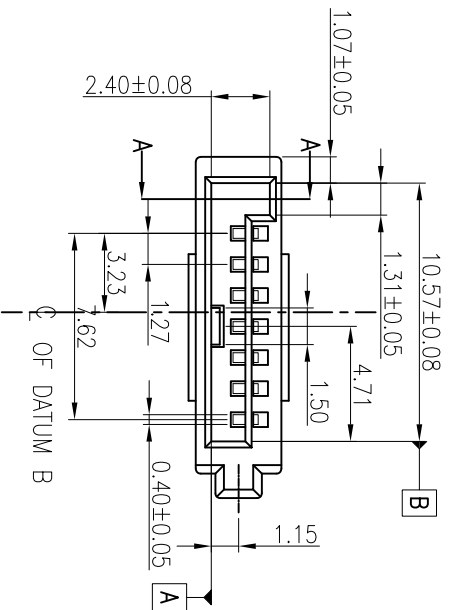

Ordering Information:

SA07E - 165 X X X - X - XX

Housing Material: B:PBT
Housing Color: K:BLACK
Packing: P:PE Bag
HF:No Halogen
RS:ROHS

PLATING TYPE: B:GOLD/TIN
F:GOLD/MATTE TIN
PLATING THICKNESS: 5:15 μm
6:30 μm
7:Gold Flush

3	SATA CONTACT	PHOSPHOR BRONZE	7	Underplate Min N300, Mating areat Min Au SELECTION Solder Tails Min 800 μm	
2	SATA STOPPER	PBT	1	UL94V-0	BLACK
1	SATA HOUSING	PBT	1	UL94V-0	BLACK
NO.	NAME	MATERIAL	QTY	STANDARD	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:	深圳市瀚云通科技有限公司 SHENZHEN HANYUNTONG TECHNOLOGY LIMITED	
	MM	DESIGN BY: 张健	DATE: 2017.01.05		
.X	±0.38	DRAWN BY: 张健	DATE: 2017.01.05		
.XX	±0.25	CHECKED BY DATE			
.XXX	±0.13	ANGULAR ±3°			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE	PART NO. SA07E-165XXX-X-XX	THIRD ANGLE PROJECTION	REVERSE ON CAD ONLY
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
				DWG NO. SA-165-0	SHEET NO. 1/1
				A4	