


REV	DESCRIPTION	ECN NO.	DATE
AA	原始图档		13.08.17

Ordering Information:

SA22D - 170 X X X - X - X - X X
Housing Material: ☐
A:LCP Housing Color: ☐
K:BLACK
PLATING TYPE ☐
B:GOLD/TIN
PLATING THICKNESS ☐
5:15 μ"
6:30 μ"
7:Gold Flash
Packing: ☐
U:tube
L:No Halogen
N/A:ROHS
MO:HY140
N/A:未指定

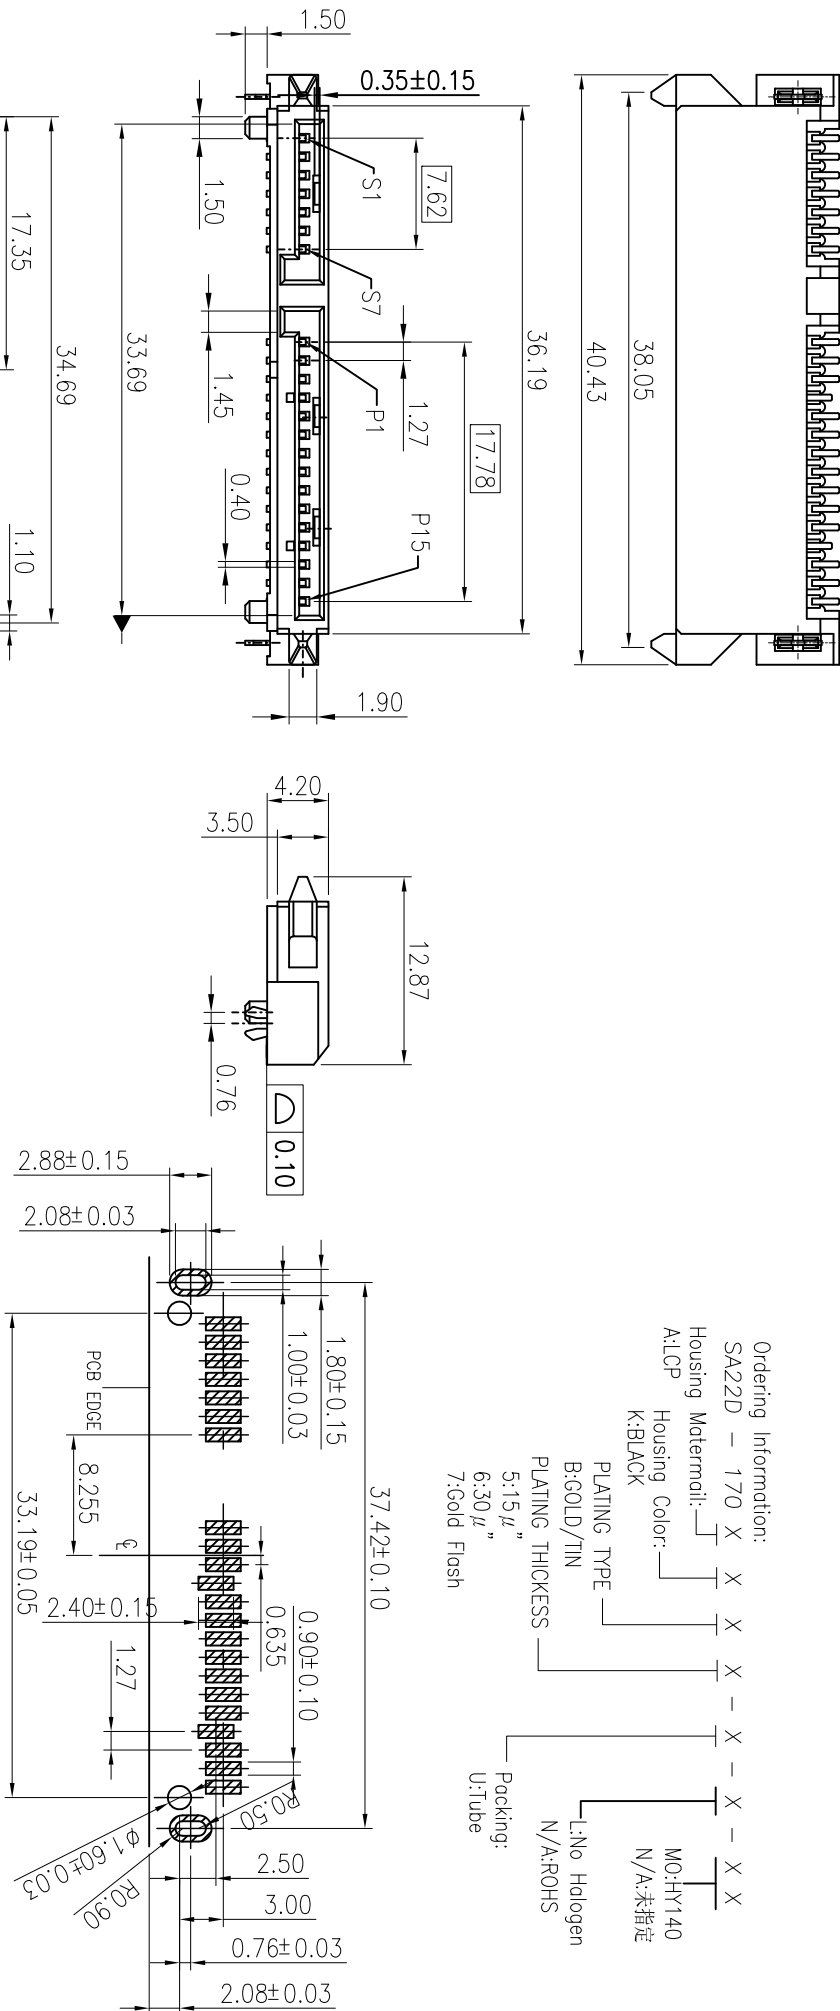

RECOMMEND PCB LAYOUT (T=1.5)
PCB TOLERANCE:±0.05

NO.	NAME	MATERIAL	QTY	STANDARD	NOTE
1	SATA CONTACT	PHOSPHOR BRONZE	22	Underplate Min. N500 ⁺ , Mating gree Min. Au SELECTION	C5191
2	SATA BOARD LOCK	BRASS	2	Solder 100%Min 100u ⁺ bright tin	C2680
3	SATA HOUSING	LCP GF-30%	1	Underplate Min. N500 ⁺ , Solder 100%Min 100u ⁺ bright tin	BLACK

GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE:	NUMBER:
MM	MM	1:1	
X	±0.38	DESIGN BY	DATE
XX	±0.25	DRAWN BY	DATE
XXX	±0.13	CHECKED BY	DATE
ANGULAR ±3°		APPROVED BY	DATE
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO.	DWG NO.
		SA22D-170XXX-X-X-XX	SA-0170-0
		THIRD ANGLE PROJECTION	REUSE ON CAD ONLY
		SHEET NO.	1/1

深圳市瀚云通科技有限公司
SHENZHEN HANYUNTONG TECHNOLOGY LIMITED

NAME: SA22D-170XXX-X-X-XX
SATA 7+15P板端板上母座SMT型高4.2鱼叉长1.50mm

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HANYUN INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
A4	