
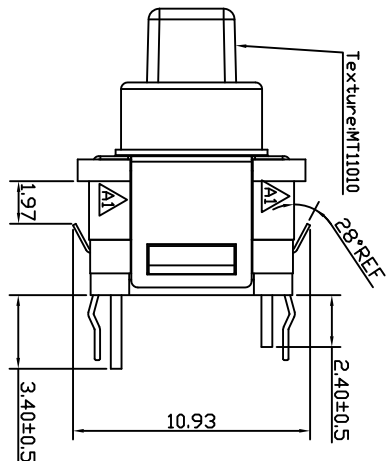
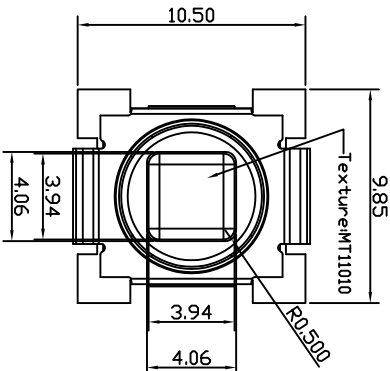
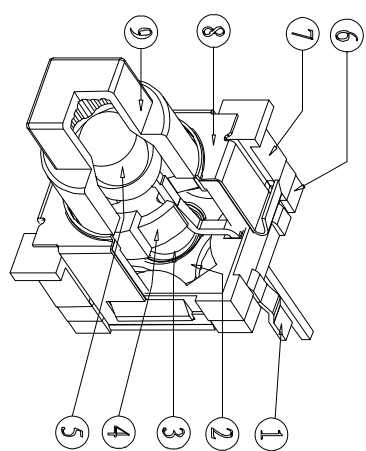


REV	DESCRIPTION	ECN NO.	DATE
AA	原始图档		2014.06.09
AA	依客户样品变更产品结构	N20141204001	2014.12.04

Specification:

- Rating: DC12V 50mA
- Contact Resistance: 100mΩ Max.
- Insulation Resistance: 100MΩ Min.
- Withstand Voltage: AC250V(50-60HZ) For 1 minute.
- Operation Force: 450±100gf
- Life Test: 25,000 Cycles
- Total Trave: 1.20±0.25mm
- Operation Type: Touch Restore

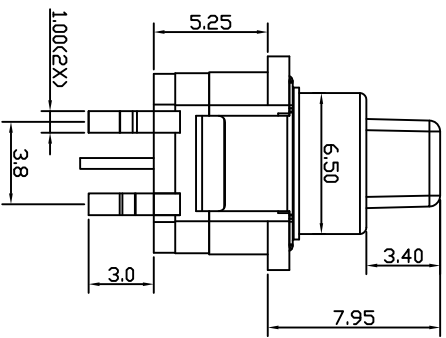

Ordering Information:
SH104A-01 I K X X - X - X - X - XX
Housing Material: I:PA10T
Housing Color: K:BLACK
PLATING TYPE: A:GOLD
PLATING THICKNESS: 9-4 μ"
7:Gold Flash
Packing: H:No Halogen RS:ROHS
I:Troy
LED发光颜色: B:Blue
A:Amber/Green
按压力: D:450g

9	Keystoke	PC		1	Transparent
8	Shell	Stainless Steel	No plating	1	SUS304
7	Cover	PA10T	30% G/F, UL94 V-0	1	Black
6	Base	PA10T	30% G/F, UL94 V-0	1	Black
5	LED	ø2.8mm Super Bright Blue LED		1	/
4	Pod	LCP	30% G/F, UL94 V-0	1	Black
3	Cubber pod	Rubber	Gray	1	Gray
2	Contact	Stainless Steel	Plating gold-flash	1	301-EH
1	Terminal	Brass	Plating gold-flash	2	C2680
NO.	NAME	MATERIAL	STANDARD	Plated	Q'TY NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:		
MM		DESIGN BY 李玉刚	DATE 2014.06.17		
X ±0.30		DRAWN BY 李玉刚	DATE 2014.12.04		
XX ±0.20		CHECKED BY DATE			
XXX ±0.10		ANGULAR ±3°	APPROVED BY DATE		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO. SH04A-001KAX-T-4F-3-B	THIRD ANGLE PROJECTION	DWG NO. SH-001-0	SHEET NO. 1/1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		ILLUMINATED SWITCH: 10. 5*9. 85mm LED BLUE			

深圳市瀚云通科技有限公司
SHENZHEN HANYUNTONG TECHNOLOGY LIMITED