

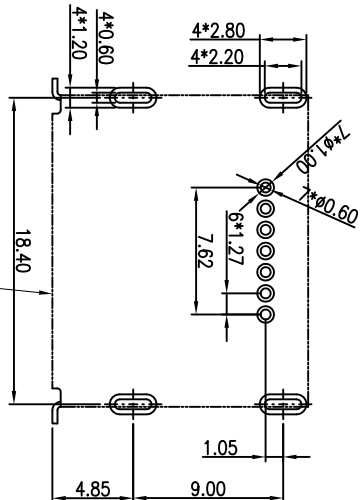
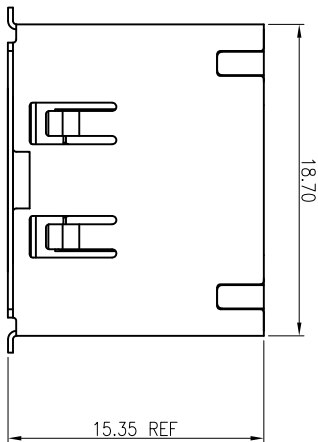
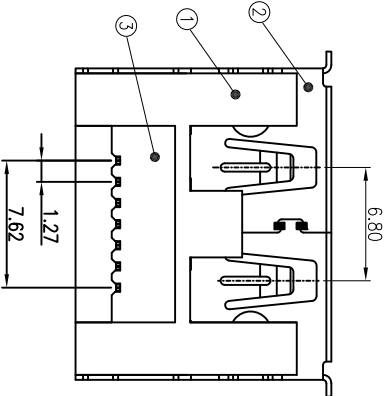


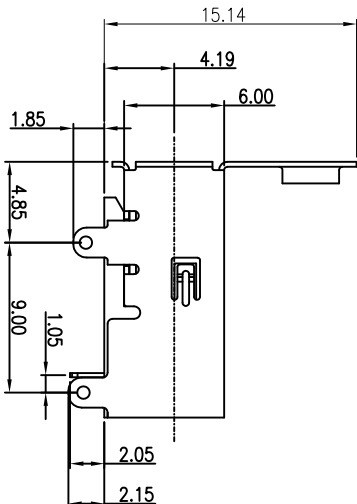

(FRONT EDGE OF CONNECTOR)
RECOMMEND P.C BOARD MOUNTING DIMENSIONS t=1.60mm
PCB TOLERANCE: ±0.05

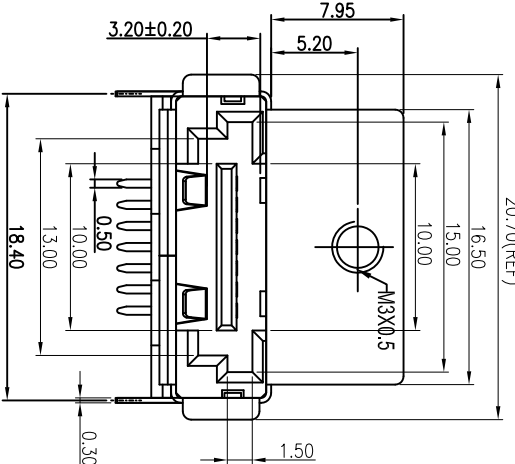

Ordering Information:

E A 07 B - 091 X X X - X - X X

Housing Material: _____

A: LCP

Housing Color: _____

K: BLACK

Packing: _____

T: Troy

R: Tape Reel

PLATING TYPE _____

B: GOLD/TIN

F: GOLD/MATTE TIN

PLATING THICKNESS _____

5: 1.5 μ"

6: 3.0 μ"

7: Gold Flash

RS: 普通ROHS
HF: No Halogen(无卤)

REV	DESCRIPTION	ECN NO.	DATE
AA	原始图档		2016.03.07
AA	按客户要求外壳材质变更为(SUS)	N0161207001	2016.12.07

3	CONTACT	BRASS	7	Underplate: Min. Ni50u" ON Mating area: SELECTION GOLD Solder Tails: Min. 100u" MATTE TIN	C2680H
2	SHELL	SUS AA	1	Min. Ni 30u"	
1	HOUSING	LCP GF30%	1	UL94V-0	BLACK
NO.	NAME	MATERIAL	Q'TY	STANDARD	NOTE
GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:	深圳市瀚云通科技有限公司 SHEENZHEN HANYUNTONG TECHNOLOGY LIMITED NAME: ESATA 7P 板端平脚式板上单排脚DIP型 (带螺母) THIRD ANGLE PROJECTION REVERSE ON CAD ONLY	
MM		DESIGN	DATE		
.X		张健	2016.03.07		
.XX		DRAWN BY	DATE		
.XXX		张健	2016.12.07		
ANGULAR ±.3		CHECKED BY	DATE		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	PART NO. EA07B-091XXXX-X-XX	DWG NO. EA-091
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CYBERAPEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1/1		A4	